

ACCURACY

0 to 20% of Range: $\pm(0.02\%$ of Full Scale)
 20% to 110% of Range: $\pm(0.1\%$ of Reading)
 Vacuum: $\pm(0.25\%$ of Full Scale*)
 * Full Scale = -14.5 psig

Includes all effects of linearity, hysteresis, repeatability, temperature, and stability for one year.

All models indicate vacuum, but vacuum specification applies to 15 psi, 30 psi, 100 psi, and 300 psi models only.

Not recommended for continuous use below -14.5 psi. Refer to [XP2i-DP data sheet](#) for gauges that are intended for continuous high vacuum use.

OPERATING TEMPERATURE

Temperature Range: **-10 to 50° C (14 to 122° F)**

Non-condensing. No change in accuracy over operating temperature range. Gauge must be zeroed to achieve rated specification.

DISPLAY


Screen: **5.5 digits**
 Single Line Display: **16.9 mm (0.67") high**
 Dual Line Display: **Main Display: 13.9 mm (0.55")**
 Secondary Display: 5.3 mm (0.21")
 Display Rate: **4 readings/second (standard)**
 8 readings/second (PSV mode)

LCD readable in sunlight with bright backlight.

PSV mode is intended for Pressure Safety Valve testing, and requires software to enable. (ConfigXP is a free download from XP2i.com.)

U.S. PATENT D612277

ALL DIMENSIONS IN MM (IN)

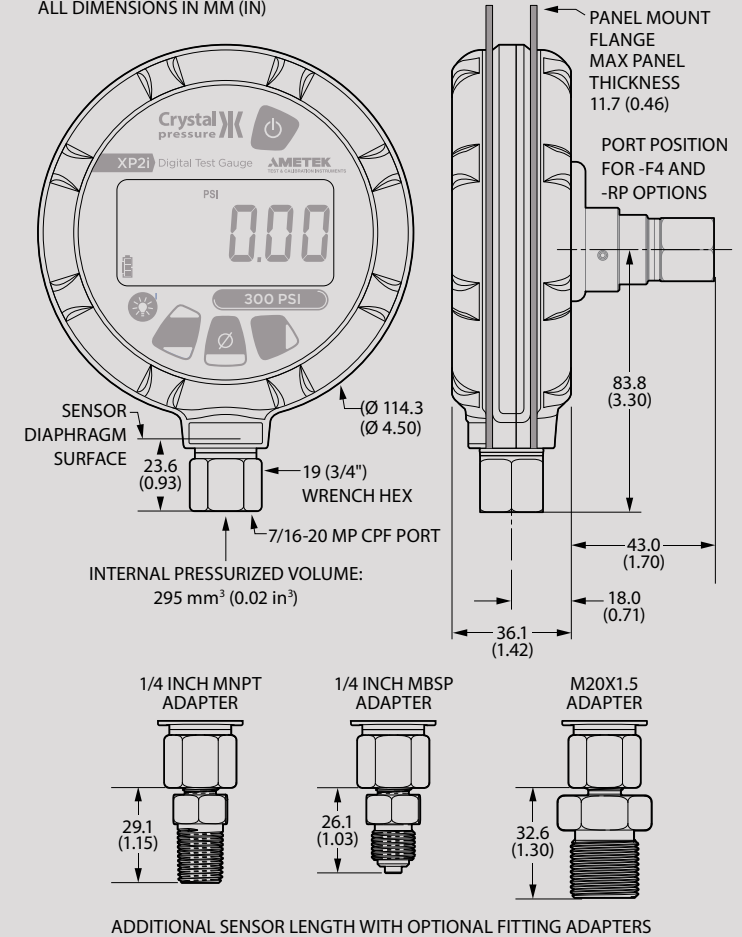

POWER

The XP2i is Intrinsically Safe only if powered by one of the following battery types.

ATEX/IECEX:	Approved Battery Type	Ta=	Marking
	Rayovac Max Plus 815	-20 to 50° C	Ex ia IIC T4 Ga
	Energizer E91		
	Energizer EN91	-20 to 50° C	Ex ia IIC T3 Ga
	Duracell MN1500		

CSA:	Approved Battery Type	Ta=	Marking
	Rayovac Max Plus 815	-20 to 45° C	Class I, Division 1, A, B, C, D T4
	Energizer E91	-20 to 50° C	Class I, Division 1, A, B, C, D T3C
	Energizer EN91		
	Rayovac Max Plus 815		

3 x AA: **1500 hours, typical**

Ultra Low Power: **> 1 year, typical****

Uses 3 alkaline AA (LR6) batteries. Use of backlight and/or RS232 reduces operating time.

Optional AC power supply available.

For hazardous location product warnings, refer to the operation manual.

**20 minute recording interval or greater in LT5 mode.

DATA/COMMUNICATION

Digital Interface: **RS232, DB-9F**

Free Labview® drivers and programming instructions are available for download from website.

For hazardous location product warnings, refer to the operation manual.

DATALOGGING

Capacity: **32 000 data points**

Storage Type: **Non-volatile flash memory**

Minimum Interval: **1 second**

Maximum Interval: **18 hours**

Min. Event Duration: **250 mS*****

DataLoggerXP Firmware Update may be purchased at time of order, or an Upgrade Package may be purchased afterward.

Software available for download from our website. Compatible with 32 & 64 bit Windows 7, Vista, and XP (32 bit only). Produces csv files, or uses Excel template files (samples included) to automatically format and graph data.

*** Logging Type - Average with Peaks.

CERTIFICATIONS



II 1G Ex ia IIC T4/T3 Ga
FTZU 12 ATEX 0048X

This product conforms to:

EN 60079-0: 2009 | EN 60079-11: 2012 | EN 60079-26: 2007



Ex ia IIC T4/T3 Ga
IECEX FTZU 12.0009X

This product conforms to:

IEC 60079-0: 2011 | IEC 60079-11: 2011-06 | IEC 60079-26: 2006



Exia Intrinsically Safe and Non-incendive for Hazardous Locations: Class I, Division 1, Groups A, B, C and D, Temperature Code T4 or T3C. For hazardous location product warnings, refer to the operation manual.



XP2i complies with the Electromagnetic Compatibility and the Pressure Equipment Directives.



The instrument was tested against **AS/NZS 3584**, C-tick EMC/EMI requirements.



XP2i is approved for use as a portable test instrument for Marine use and complies with Det Norsjke Veritas' Rules for Classification of Ships, High Speed & Light Craft and Offshore Standards.

ENCLOSURE

Weight: 562 g (19.8oz)	<i>Weight includes batteries.</i>
Rating: IP67	<i>Submersible to 1 m for 30 minutes [IEC 60529].</i>
Housing: Diecast aluminum	<i>Nickel plating over low copper, marine grade aluminum.</i>
Keypad and Labels: UV Resistant Polyester	<i>LCD protected from impact damage by 1.5 mm (0.06") thick polycarbonate lens under polyester window.</i>
	<i>Skydrol® compatible.</i>
	For hazardous location product warnings, refer to the operation manual.

SENSOR

Wetted Materials: (WRENCH TIGHT) 316 stainless steel	<i>All welded, with a permanently filled diaphragm seal.</i>
(FINGER TIGHT) 316 stainless steel and Viton® (internal o-ring)	<i>Metal to metal cone seal; O-ring can be removed if necessary.</i>
Diaphragm Seal Fluid: Silicone Oil	<i>Optional connection on back.</i>
Connection: Crystal CPF♦ Female	<i>1/4" male NPT adapter included unless BSP, M20, or 15KPSI is specified.</i>
	<i>1/4" medium pressure tube system compatible with HIP LM4 and LF4 Series, Autoclave Engr SF250CX Male and Female Series.</i>
	<i>♦U.S. Patent No. 8,794,677</i>

STORAGE TEMPERATURE

Temperature Range: -40 to 75° C (-40 to 167° F)	<i>Batteries should be removed if stored for more than one month.</i>
--	---

SPECIAL FEATURES

The following requires the use of our free [ConfigXP](#) software

- User Defined Unit: **Allows the user to define and display any pressure units not included, or to use the gauge to display force, level, or other pressure related parameters. Reduce or increase displayed resolution.**
- PSV Mode: **Intended for pressure safety valve / burst disk testing. 8 readings per second. Captures point at which valve opens, as well as reseal pressure.**
- Averaging: **Smooths unsteady readings (1 to 10 samples).**
- Remove: **Unwanted pressure units from Units button.**
- Disable: **Peak pressure button.**
- Limit or Disable: **Zero button.**
- Password Protect: **Changes to configuration or calibration factor(s).**
 - Save: **Configuration to a file.**
 - Copy: **Configuration can be copied to other gauges.**

RANGE & RESOLUTION TABLE

P/N	Range (psi)	Over-pressure	Display Resolution									
			psi	in H ₂ O	in Hg	mm Hg	mm H ₂ O	kg/cm ²	bar	mbar	kPa	MPa
15PSI	15	6.5 x	0.001	0.01	0.001	0.01	1	0.0001	0.0001	0.1	0.01	0.00001
30PSI	30	3.0 x	0.001	0.01	0.001	0.1	1	0.0001	0.0001	0.1	0.01	0.00001
100PSI	100	2.0 x	0.01	0.1	0.01	0.1	1	0.0001	0.0001	0.1	0.01	0.00001
300PSI	300	2.0 x	0.01	0.1	0.01	1		0.001	0.001	1	0.1	0.0001
500PSI	500	2.0 x	0.01	1	0.1	1		0.001	0.001	1	0.1	0.0001
1KPSI	1000	2.0 x	0.1		0.1			0.001	0.001		0.1	0.0001
2KPSI	2000	2.0 x	0.1		0.1			0.01	0.01		1	0.001
3KPSI	3000	1.5 x	0.1		0.1			0.01	0.01		1	0.001
5KPSI	5000	1.5 x	0.1		1			0.01	0.01		1	0.001
10KPSI	10000	1.5 x	1					0.01	0.01		1	0.001
15KPSI	15000	1.3 x	1					0.01	0.01		1	0.001

ORDERING INFORMATION

P/N	Model	Dual Display	Adapter Type	Connection Location	Data-logging	CPF* Fitting Kits	Pump System**	Liquid (Systems C-H)	Carrying Case~
_____	XP2I	_____	_____	_____	_____	_____	_____	_____	_____
Standard:	No ... (omit)	NPT (omit)	Bottom (omit)	No (omit)	No (omit)	No (omit)	No Pump. (omit)		
Optional:	Yes.... -DD	G 1/4 B -BSP	Back -RP	Yes..... -DL	NPT Kit (4013) ... -N	System A (pneumatic) 0 to 30 psi -AXX	Full (omit)	Aluminum ... (omit)	
		M20x1.5... -M20	Panel Mount ... -F4		BSP Kit (4015) ... -B	System A (pneumatic) 0 to 580 psi -AHX	Drained..... -E	Waterproof..... -W	
						System B (pneumatic) -25 inHg to 30 psi. -BXX			
						System B (pneumatic) -25 inHg to 580 psi -BHX			
						System C (oil) 0 to 3000 psi -CXX			
						System C (oil) 0 to 5000 psi -CHX			
						System D (oil) 0 to 5000 psi -DOX			
						System D (water) 0 to 5000 psi -DWX			
						System E (oil) 0 to 10 000 psi. -EOX			
						System F (oil) 0 to 15 000 psi. -FOV			
						System F (water) 0 to 15 000 psi. -FWV			
						System G (oil) 0 to 15 000 psi -GOX			
						System G (water) 0 to 15 000 psi -GWX			
						System H (oil/pneumatic) -25 inHg to 580 psi and 0 to 5000 psi ... -HOX			

SAMPLE PART NUMBERS

- 300PSIXP2I 300 psi standard gauge, with a 1/4" NPT pressure fitting.
- 5KPSIXP2I-BSP-DL 5000 psi gauge, with a 1/4" BSP pressure fitting and Data-logging.
- 10KPSIXP2I-DD-N-GWX-E-W 10 000 psi Dual Display gauge with an NPT CPF fitting kit; a System G pump system; no liquid; and a waterproof carrying case.

Note: The 15KPSI gauge is available only with the CPF fitting.

► Ordering a Pump System Only

Any pump system, carrying case, and connection fittings for an XP2i pressure gauge may be ordered separately from the gauge. Enter XP2I-NONE followed by the Pump System part number and the Carrying Case option code.

SAMPLE PART NUMBER

XP2I-NONE-GWX-W System G pump system with a waterproof carrying case.

* CPF Fitting Kits can **only** be ordered as part of a Pump System. All fittings are rated to 10 000 psi, with the exception of the MPF-1/2QTF rated to 5000 psi.
 ** Refer to the following page for a more detailed description of each Pump System.
 ~ The Waterproof Case is an **option** for Systems A, B, and C only. The Waterproof Case is the **only option** for Systems G and H.



900 Series

PUMP SYSTEMS

All pump systems for the XP2i include 1/4 NPT and BSP female fittings and a carrying case with custom insert. Additional fittings and accessories included with individual systems are listed below.

- ▶ **Systems A...** AXX (T-960), AHX (T-970)
MPH-1 hose, bonded seals, o-ring kit, and teflon tape.



600 Series

- ▶ **Systems B...** BXX (T-965), BHX (T-975-CPF)
MPH-1 hose, bonded seals, o-ring kit, and teflon tape.

- ▶ **Systems C...** CXX (T-620), CHX (T-620H-CPF)
MPH-1 hose, MPF-CAP, MPM-PLUG, bonded seals, and teflon tape.



P-018-CPF

- ▶ **Systems D...** DOX and DWX (P-018-CPF)
Bonded seals and teflon tape.

- ▶ **System E...** EOX (P014)
Bonded seals and teflon tape.



P014

- ▶ **Systems F...** FOV and FWV (T-1-CPF)
Bonded seals and teflon tape.

- ▶ **Systems G ...** GOX and GWX (GaugeCalHP)
Carrying case hold-down straps.

- ▶ **System H...** HOX (T-975-CPF and T-620H-CPF)
MPF-CAP, MPM-PLUG, bonded seals, o-ring kit, and teflon tape.



T-1-CPF

CPF FITTING KITS

- ▶ **NPT Kit...** -N (4013)
Includes MPF-1/8QTF, MPF-1/4QTF, and MPF-1/2QTF.

- ▶ **BSP Kit...** -B (4015)
Includes MPF-1/8BSPF, MPF-1/4BSPF, MPF-3/8BSPF, and MPF-1/2BSPF.



GaugeCalHP

ACCESSORIES



Protective Boot P/N 3696

Protect your XP2i even more from harsh environments with our form fitting chemical resistant thermoplastic boot (Skydrol fluid compatible).

AC Adapter Kit P/N 2984

For continuous use applications without battery replacement concern. Input voltage: 100 - 240V, 50-60 Hz. Includes all available international plugs. For hazardous location product warnings, refer to the operation manual.

COMPLIMENTARY PRODUCTS

Crystal Engineering offers a wide range of products that work with the XP2i:

- [Fittings that connect without tools, safely and without leaks](#)
- [Lightweight, super flexible high pressure hoses](#)
- [Complete Calibration Kits](#)
- [Pneumatic hand pumps](#)
- [Hydraulic hand pumps](#)
- [Portable pressure comparators](#)
- [Software, for the quickest way to calibrate pressure transmitters and gauges](#)

Autoclave Engineers Fluid Components is a division of Snap-tite, Inc.

HIP is High Pressure Equipment Company.

Viton is a registered trademark of DuPont Performance Elastomers.